

Elastomer Bellow Mechanical Seals

...SH-BIA

● **Operational Conditions:**

Temperature: -20°C to +120°C

Pressure: ≤1.0MPa

Speed: ≤15m/s

● **Materials:**



Stationary Ring: V1, Q2, Q1, U2

Rotary Ring: B, A, Q1, Q2

Secondary Seal: V, P, E

Spring and Metal Parts: F, G

● **Applications:** Clean water, sewage water, oil And other moderately corrosive fluids.

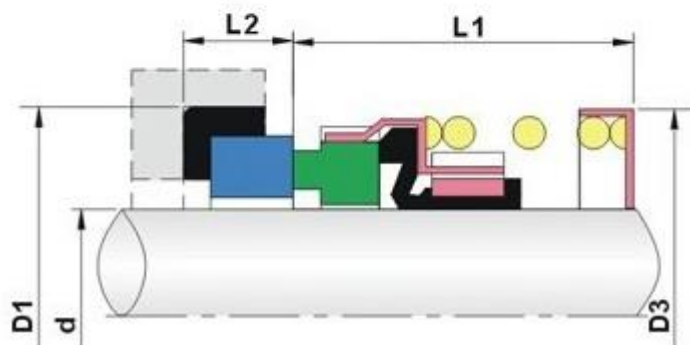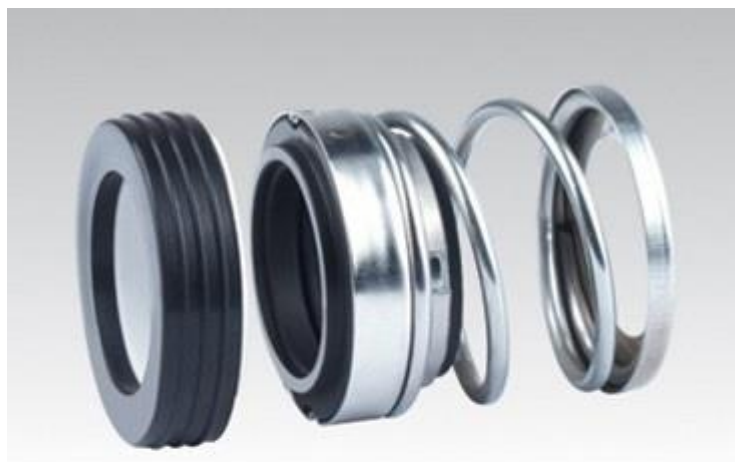

Size (Metric)	d	D3	D1	L1	L2
14	14	27.5	30	19.0	5.0
16	16	28.5	32	21.0	5.0
18	18	31.2	35	22.5	7.5
20	20	31.7	35	21.0	8.0
25	25	40.2	40	25.5	8.0
28	28	44.1	43	25.5	8.0
30	30	45.1	45	33.5	9.0
32	32	49.0	48	33.5	9.0
33	33	49.0	48	33.5	9.0
35	35	50.2	50	33.5	9.0
38	38	55.3	56	33.5	9.0
40	40	57.0	58	33.5	9.0
43	43	60.7	61	36.5	9.5
45	45	62.5	63	38.0	9.5
48	48	66.5	66	38.0	9.5
50	50	68.6	70	38.0	9.5
53	53	70.8	73	41.0	9.5
55	55	72.4	75	41.0	9.5
58	58	80.0	78	42.0	9.5
60	60	83.0	80	42.0	9.5
65	65	87.2	85	42.0	10.0
70	70	91.6	92	45.0	11.0
75	75	99.4	97	47.0	12.0
80	80	104.6	104	55.0	12.0
85	85	111.0	109	64.0	12.0
90	90	113.0	114	66.0	12.0

ООО «ФУДМАШ»

Юридический и почтовый адрес: 350067, РФ, Краснодарский край, г. Краснодар, ул. Душистая, дом 55, кв./оф. 5

Адрес склада: РФ, Краснодарский край, Динской район, пос. Южный, ул. Водозаборная, дом 58

тел./ф: +7 (861) 256-75-47, моб.: +7 (918) 674-51-74, +(989)277-91-91 www.f-mash.ru - info@f-mash.ru